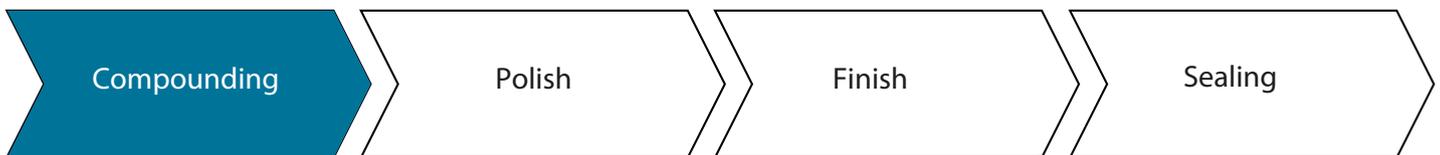


**Product information**

Water borne silicone free rubbing compound designed to quickly and permanently remove sanding scratches on gelcoats and ceramic clearcoats. Will remove sanding scratches from P800 and finer depending on application and polishing pad.

**Product advantages**

- Fast and efficient
- Silicone free

**Surfaces**

- Gelcoat
- Ceramic clearcoat
- Old paint
- Wood high gloss coatings

**Polishing machine**

- Rotating 800 – 2000 rpm

**Polishing pad**

- Twisted lambswool
- Natural lambswool

**Product properties**

Speed:

Polish, gloss:

**Work instruction**

1. Shake or stir polishing compound before use
2. Do not use too much compound at a time. Use a small amount which is consumed on a focused area - less messing and clean up!
3. Clean thoroughly before and after polishing
4. Work focused on an area of 40x40 cm at a time
5. Polish until a scratch free surface is achieved
6. Keep the pad clean, a dirty pad causes deep swirls and scratches

**Technical specifications**

Density: 1,45 kg/l  
 Viscosity: 20,5 Pas  
 Colour: White

**Storage recommendations**

Recommended storage temperature:  
 15° - 25° C / 59° - 77° F  
 Keep from freezing